



## atFoliX Screen Protector Assembly Instructions (WITH finishing tab)



English – Assembly Instructions:  
<http://atfolix.info/manuals/en>



MADE IN  
RATINGEN



facebook.de/atfolix



youtube.com/atfolix

## TIPS AND TRICKS

**!** THIS PRODUCT IS PROTECTED WITH PROTECTIVE FILM;  
**■** IT MAY BE COLOURED OR PATTERNED DEPENDING ON THE FILM TYPE – IT SHOULD ONLY BE REMOVED **AFTER** SUCCESSFUL APPLICATION OF THE SCREEN PROTECTOR FILM.



I) To get an accurate impression of the screen protector appearance in terms of fit (size and shape) on the screen, we recommend placing it over the screen without removing any of the film covers.

II) No dust! Mount the screen protector in a dust-free atmosphere, e.g. bathroom. Allow hot water to run for a few minutes until the room is steamy. This will allow dust particles in the air to bind and avoid static.

III) However, should a dust particle be caught between the screen and protection film (this is the reason for air bubbles that cannot be wiped away), they can be removed with the enclosed dust remover. Lift the protective film using the corner tab and pull it off as much as required. The dust particles can then simply be dabbed away.

IV) If required, you can removed the film and repeat the procedure. To do this, carefully remove the film with a piece of tape and clean the adhesive layer with warm water and a little dishwashing liquid. The film can be thoroughly cleaned using the fingers. Afterwards, waft the film around to carefully remove water droplets and repeat the application procedure.


## ALTERNATIVE METHOD OF APPLICATION



For a very simple application, we recommend our 'hinge method, this can be found on page 6.

## COMPOSITION OF THE FX SCREEN PROTECTOR

- A) Product protection film with finishing tab
- B) Screen protector film
- C) Carrier film with laser engraving on the tab

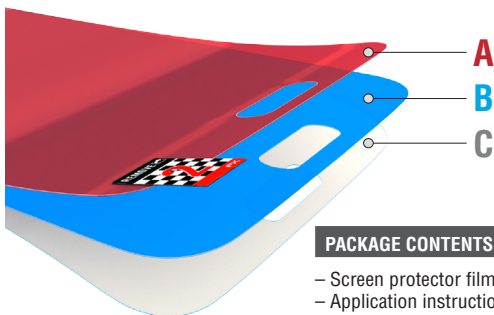

## PACKAGE CONTENTS

- Screen protector film
- Application instructions
- Scraper (application card)
- Vacuum-packed microfibre cloth
- Dust remover

## PREPARATION



❶ The **protection film with finishing tab** must initially be prepared so it can be easily removed at the end of application: To do this, lift the **finishing tab** slightly, so the **product protection film** is lifted slightly away from the **screen protector film** at this corner.




❷ + ❸ Clean the display thoroughly and with some pressure using the microfibre cloth. Remove more severe contamination using a suitable cleaner.

Pay particular attention to ensure a dust-free environment. For best results, the screen must be **dust free**.

Larger dust particles can simply be removed with the dust remover.




## APPLICATION




❹ Bend the engraved tab backwards and pull the **packaging film** off by about a third.

Please do not touch the revealed adhesive layer and ensure the most dust-free environment possible.



❺ Place the film over the device – prevent immediate contact between the screen and the revealed adhesive layer.

**Please make sure that any cutouts are aligned and centred around speakers, camera, etc., and that edges of the foil are parallel to the edges of the screen.**




**6** Once the film is precisely aligned, handle the screen with the upper revealed part of the screen protector film. The suction effect pulls the upper part of the film onto the screen.



**7 + 8** Pull the packaging film from under the **screen protector film** slowly and push along using the scraper, while applying even pressure.



**9 + 10** Wrap the microfibre cloth around the scraper and push any air bubbles out towards the edges.






**11** Now remove the **product protection film** using the **finishing tab**:

to do this, lift the **finishing tab** slightly and then completely pull the **product protection film** off carefully.

Please ensure that the actual **screen protector film** does not pull away from the screen – if required hold the foil down.



**TIP:** Pull the product protection film off at the lowest possible angle:

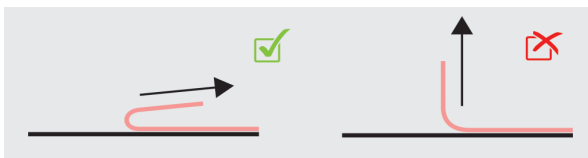

Finally, polish the **display protector** film with the microfibre cloth. Fine trapped air can be worked out in the same way.

Finish. Your screen is now well protected from scratches and everyday wear and tear.

For videos, tips & tricks, instructions in other languages and information on our films visit us at:

**<http://atfolix.info/manuals>**






## ALTERNATIVE APPLICATION OF THE FX-DISPLAYSCREEN PROTECTOR – THE HINGED METHODE

We have developed another method to guarantee application of the screen protector film.

**This application method is really easy, as during application the screen protector film is held with an improvised hinge.**



You will need two pieces of tape of about 3 and 5 cm each in length.

**Preparation:** Firstly clean the screen as described in points 1 - 3 on page 3.




1 Fasten the long piece of tape in the lower screen area on the screen protector foil and position the foil precisely on your device.

2 Place the strip of tape on the lower edge of the device and attach it to the rear side of the device.



3 Now attach the short piece of tape to the opposite side on the screen protector film (passing over the engraved tab).

4 Then place the engraved tab downwards and carefully remove the entire packaging film. While doing this, hold the display protector film with the piece of tape held upwards.



5 Hold the display protector film under gentle tension using the upper piece of tape on the display.

6 Spread the film flat on the screen and remove the **product protection film** as described on **Page 4** from point 9 onwards.